

Technical Data


Graduation: 0.01mm, 0.001mm, .001" or .0001"
Spindle pitch: 0.5mm or .025"

Micrometer Heads SERIES 150 — Medium-sized Standard Type


- Measuring range of 25mm.

DIMENSIONS

Plain stem

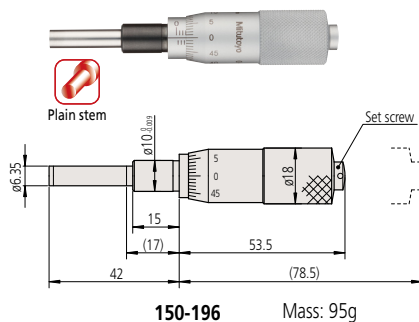


Stem locknut

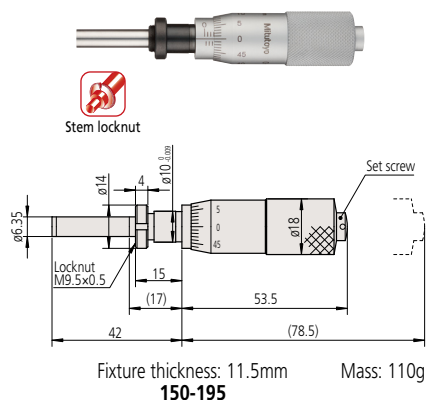


Plain stem and spindle lock

Unit: mm

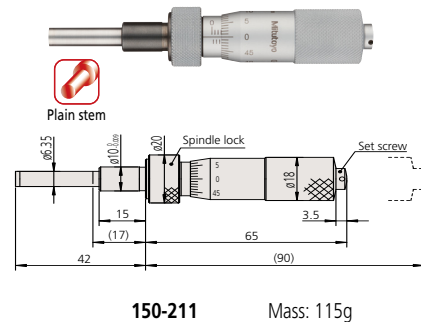

Stem locknut and spindle lock

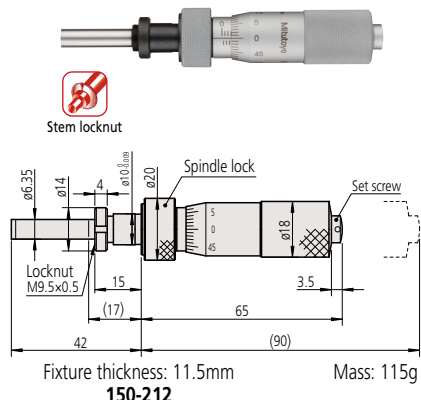

() : With spindle fully retracted.

SPECIFICATIONS

Metric						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
150-192	0 - 25mm	±2μm	10mm	Plain	Flat (carbide tip)	Standard
150-191				W/ clamp nut		
150-209				Plain*		
150-210				W/ clamp nut*		
150-801				Plain	Spherical (SR4) (carbide tip)	Standard
150-802				W/ clamp nut		
150-821				Plain	Flat (carbide tip)	Reverse reading
150-822				W/ clamp nut		
150-190				Plain		W/vernier (0.001mm)
150-189				W/ clamp nut		
150-183**				Plain*		
150-184				W/ clamp nut*		
150-196				Plain	Flat (carbide tip)	w/o ratchet stop
150-195				W/ clamp nut		
150-211				Plain*		
150-212				W/ clamp nut*		
150-219				Plain	Flat	Long spindle
150-220				W/ clamp nut		
150-803**				Plain*	Spherical (SR4) (carbide tip)	Standard
150-804**				W/ clamp nut*		
150-823**				Plain*	Flat (carbide tip)	Reverse reading
150-824**				W/ clamp nut*		
150-223**				Plain*	Flat	Long spindle
150-224**				W/ clamp nut*		

* with spindle lock ** made-to-order models

Inch						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
150-208	0 - 1"	±.0001"	.375"	Plain	Flat (carbide tip)	Standard
150-207				W/ clamp nut		
150-213**				Plain*		
150-214**				W/ clamp nut*		
150-811				Plain	Spherical (SR4) (carbide tip)	Standard
150-812				W/ clamp nut		
150-831				Plain	Flat (carbide tip)	Reverse graduation
150-832				W/ clamp nut		
150-206				Plain		W/vernier (.0001")
150-205**				W/ clamp nut		
150-215**				Plain*		
150-216**				W/ clamp nut*		
150-198				Plain	Flat (carbide tip)	w/o ratchet stop
150-197				W/ clamp nut		
150-217**				Plain*		
150-218**				W/ clamp nut*		
150-221**				Plain	Flat	Long spindle
150-222**				W/ clamp nut		

* with spindle lock ** made-to-order models