


Mitutoyo

Mitutoyo Quality

Shop-floor Type CNC Coordinate Measuring Machine **MiSTAR 555**

COORDINATE
MEASURING MACHINES

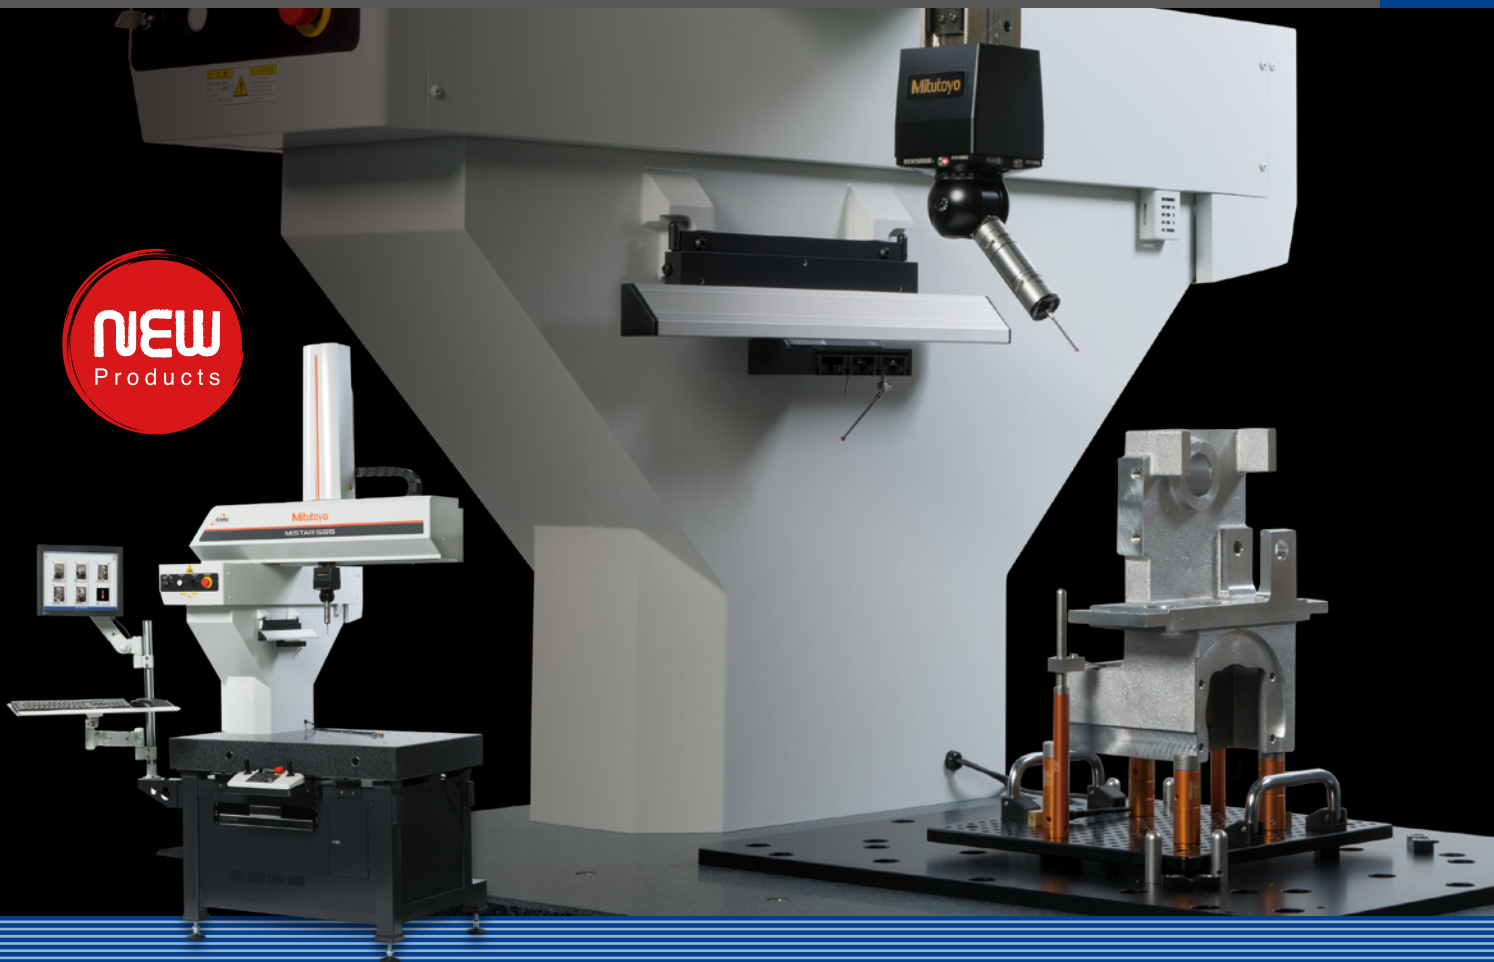

Next-generation Coordinate Measuring Machine for Shop floor

MiSTAR 555

Highly Environment-resistant Coordinate Measuring Machine,
Allowing On-site Inspection outside the Measuring Room.

MiSTAR 555 is a CNC coordinate measuring machine conceived to be a “measuring machine for any environment”. Wide accuracy-guaranteed temperature range, environment-resistant absolute scale, and all-in-one space-saving design.

With performance that sets it apart from conventional coordinate measuring machines, MiSTAR 555 will help boost your productivity.



Mitutoyo

MiSTAR 555

Mitutoyo

RENISHAW
FRT1000

Environment

A large industrial coordinate measuring machine (CMM) with a white and grey body and red accents. The machine is labeled 'Mitutoyo' and 'MiSTAR 555'. It features a large, flat, dark grey table and a complex, multi-jointed arm that holds a probe. The background is dark, making the machine stand out.

Making measurements in harsh shop floor environments possible.

With an environment-resistant absolute scale^{*1} and revamped body structure, MiSTAR 555 is a contamination-resistant coordinate measuring machine. Highly reliable as a result of real-time temperature compensation technology that guarantees accuracy over a wide temperature range, it delivers a length measurement error of just $E_{0, MPE}$ of $2.2 + 3L/1000 \mu m^{*2}$.


MiSTAR 555 can be installed and operated next to machine tools on production lines.

^{*1} Absolute-type, linear scale that provides an absolute value for each measurement point.
Allows for reading of the position value straight after power on, without any setup.

^{*2} When used with SP25M in temperature environment 1 (18 °C to 22 °C).

Wide accuracy-guaranteed temperature range


The accuracy-guaranteed temperature range of 10 °C to 40 °C is achieved as a result of body architecture designed with temperature trackability in mind. The real-time workpiece temperature compensation makes temperature stabilization unnecessary, allowing for installation in a wider range of temperatures than is usual for a CMM.

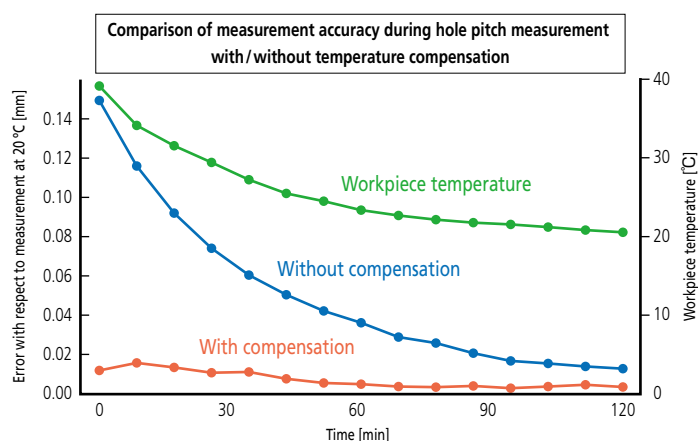

A Coordinate measuring machine resistant to contamination

A newly developed environment-resistant absolute scale having more than twice (in-house comparison) the contamination resistance of conventional models has been adopted, together with linear guides on the moving elements. Conventional air bearings require a clean environment and pressurized air to avoid “galling” and “clogging”. However, the linear guides not only make pressurized air unnecessary, but also improve robustness as a result of increased environment resistance.


This CMM can go without maintenance for long periods, even when used on a shop floor subject to airborne oil mist.

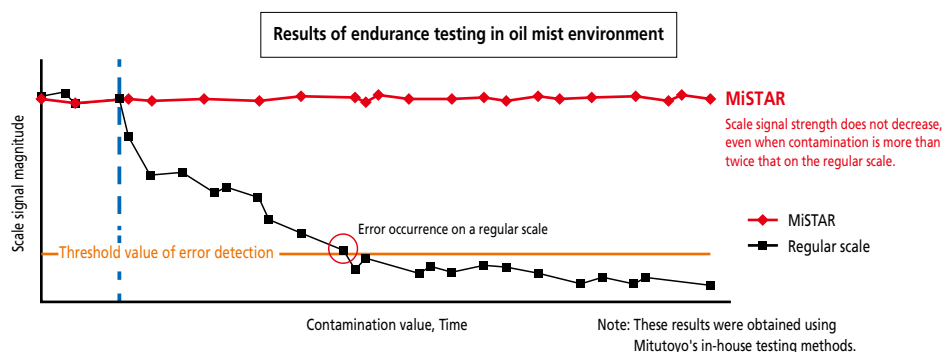

Energy-saving

With a wide accuracy-guaranteed temperature range and without the need for pressurized air, MiSTAR 555 does not require a measuring room for its installation. This allows for substantial reduction in running costs compared with conventional coordinate measuring machines because it does not require air conditioning and air supply facilities.

Note 1: Air-conditioning power consumption is the average of models for domestic use and rooms up to 18 m².
Note 2: Air-compressor power consumption is the average of models with a discharge rate of 42 L/min.

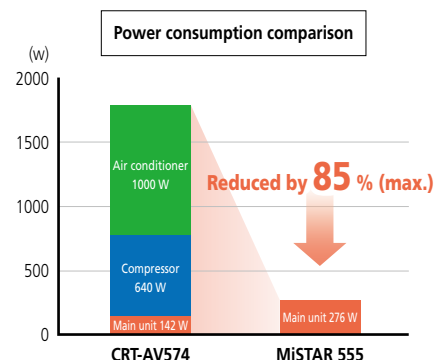


Usability

User-friendly design that reduces the operator's workload.

Cantilever architecture used to open the measurement area on three sides is the result of overhauling the measuring machine body design, starting from its material quality. Compared with a portal architecture, it makes moving workpieces on and off the measuring table significantly easier. The user-friendliness of MiSTAR 555, enabled by being open on three sides, can be seen especially on shop floors and the like where workspace is often limited.

Improved efficiency with three-sided open architecture

Three-sided open architecture while securing an ample measuring range of 570 (X) x 500 (Y) x 500 (Z) mm is very convenient for moving workpieces on and off the measuring table.

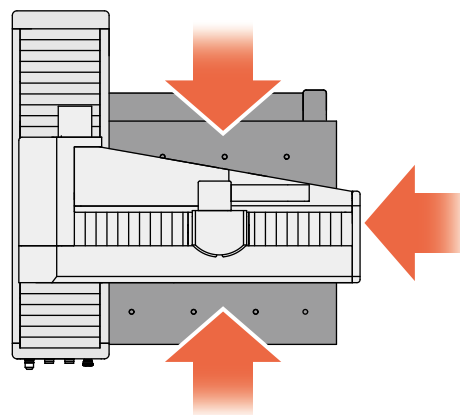

Simple, single button operation to start measuring

MiSTAR 555 comes with the Quick Launcher, which enables simple and intuitive operation for easy part program execution.

The touch panel monitor further improves operability, allowing anyone to easily execute part programs.



Positioning cannot be easier: Simply place the workpiece on the measuring table

The optional clamping system and pallet receiver with positioning mechanism allow you to start measuring just by placing the workpiece on the measuring table, relieving you of the trouble of positioning the workpiece.



Smart Factory

From status management to preventive maintenance.
Kickstart your smart factory through visualization.

Allows you to monitor the operational status and condition of your coordinate measuring machine in real time, thereby realizing a non-stop system.



SMS (Smart Measuring System)


This system allows on-line monitoring of the operational status of a measuring machine and visualization of measurement data produced during the manufacturing process to enable product quality improvement.



Status Monitor

Monitoring and logging of measuring machine operational status

Allows you to centrally monitor the operational status of coordinate measuring machines connected to a network, along with other measuring machines on the network. "Visualizing the operational status" allows you to reduce waste and improve the operating ratio of your production facilities.

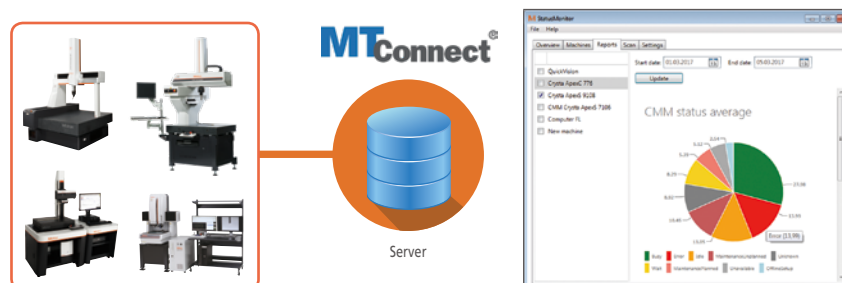


Condition Monitor

Preventive maintenance based on measuring machine status monitoring

"Visualization of status" through constant collection and accumulation of coordinate measuring machine status information, such as the probe touch count and total distance traversed by each moving element along each axis, helps to prevent sudden machine stoppages that could have been avoided by timely maintenance.


Status monitoring enables you to achieve a non-stop production facility.

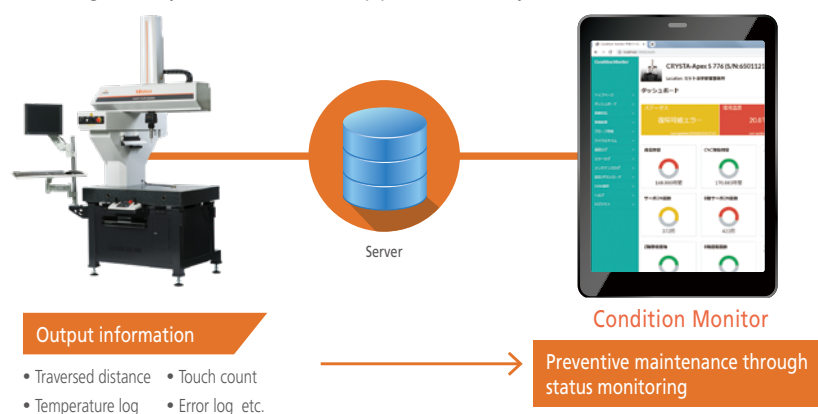

MeasurLink

Process management based on measurement data collection and analysis

"Visualization of quality" by collecting and accumulating measurement data from networked measuring machines, and then statistically processing this data on a server in real time helps to reduce defective products.

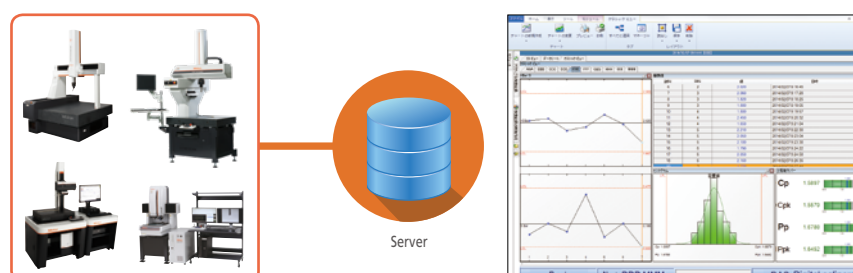

Compact

Footprint-reducing all-in-one architecture broadens
MiSTAR 555 options for installation sites.

The storage cabinet for PC, machine controllers, etc., under the
measuring table reduces the footprint by about 20 % when compared
with that of other coordinate measuring machines with similar
measuring range.


Coordinate measuring machine footprint comparison

CRYSTA Apex V544

Measuring range
X: 500, Y: 400, Z: 400
Footprint: 1.58 m²

MiSTAR 555

Measuring range
X: 570, Y: 500, Z: 500
Footprint: 1.26 m²

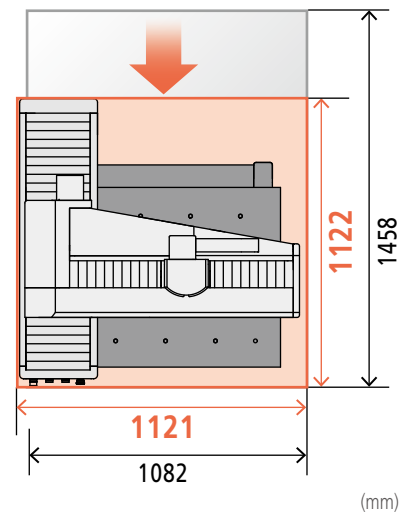

Option

For more efficient settings.

Clamping system Eco-Fix Kit

Can hold workpieces of diverse shapes by combining a wide variety of parts.
Furthermore, additional parts are available for you to broaden the shapes of
held workpieces.



Pallet receiver

Clamping system

Software





Application software that offers both functionality and operability.

We offer an extensive lineup of application software for generating measurement programs automatically, conducting gear analysis, performing evaluations using CAD and so on. From simple to complex measurements, these software applications can resolve any measurement issues that our customers may encounter.

MCOSMOS

Data Processing Software for CMMs


A family of dedicated programs for coordinate measuring machines. A basic software with rich functionality and a wide variety of optional programs allows you to measure and analyze any workpiece.



MiCAT Planner

Automatic Measurement Program Generation Software for CMMs

Allows you to automatically generate measuring programs from the 3D CAD model. Ready-to-use programs are generated in the shortest time based on the minimum number of probe repositionings, number of probe changes, and shortest measurement path assessed by the optimization software.

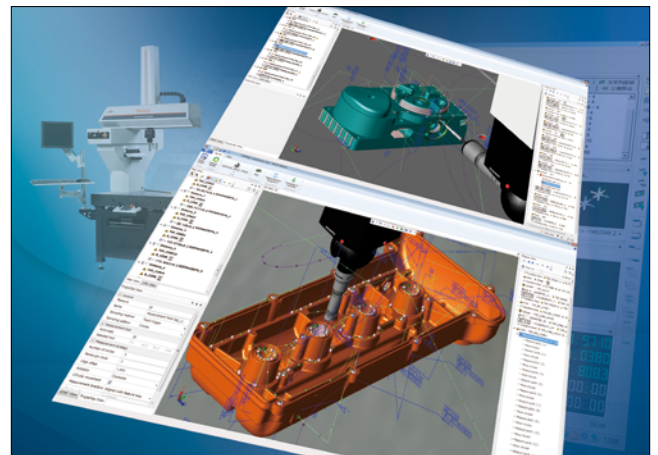

Coordinate Measuring Machines


Vision Measuring Systems

Form Measurement


Optical Measuring



Sensor Systems

Test Equipment
and Seismometers

Digital Scale and DRO Systems

Small Tool Instruments
and Data Management

Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MICAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

Our products are classified as regulated items under Japanese Foreign Exchange and Foreign Trade Law. Please consult us in advance if you wish to export our products to any other country. If the purchased product is exported, even though it is not a regulated item (Catch-All controls item), the customer service available for that product may be affected. If you have any questions, please consult your local Mitutoyo sales office

Mitutoyo

Mitutoyo Asia Pacific Pte. Ltd.

Company Reg No. 197800892N

24 Kallang Avenue, Mitutoyo Building, Singapore 339415

Tel: (65) 6294 2211 Fax: (65) 6299 6666

E-mail: mapsg@mitutoyo.com.sg

REGION SUPPLIERS PTE LTD

UEN. No: 197600011W

Blk 16 Kallang Place #01-02

Kallang Basin Industrial Estate

Singapore 339156

Tel: (65) 6295 2288 Fax: (65) 6291 4764



www.mitutoyo.com.sg | www.mitutoyo.com.my

www.mitutoyo.co.th | www.mitutoyo.co.id

www.mitutoyo.com.vn | www.mitutoyo.com.ph

Mitutoyo (Malaysia) Sdn. Bhd.

Mah Sing Integrated Industrial Park,
4, Jalan Utarid US/14, Section U5,
40150 Shah Alam, Selangor, Malaysia

Tel: (60) 3-7845 9318

Fax: (60) 3-7845 9346

E-mail: mmsb@mitutoyo.com.my

Penang Branch

Tel: (60) 4-641 1998 Fax: (60) 4-641 2998

Johor Branch

Tel: (60) 7-352 1626 Fax: (60) 7-352 1628

Mitutoyo (Thailand) Co., Ltd.

76/3-5, Chaengwattana Road, Kwaeng
Anusaawaree, Khet Bangkaen,
Bangkok 10220, Thailand

Tel: (66) 2080 3500

Fax: (66) 2521 6136

E-mail: office@mitutoyo.co.th

Chonburi Branch

Tel: (66) 2080 3563 Fax: (66) 3834 5788

ACC Branch

Tel: (66) 2080 3565

PT. Mitutoyo Indonesia

Jalan Sriwijaya No.26
Desa cibatu
Kec. Cikarang Selatan
Kab. Bekasi 17530, Indonesia

Tel: (62) 21-2962 8600

Fax: (62) 21-2962 8604

E-mail: ptmi@mitutoyo.co.id

Mitutoyo Vietnam Co., Ltd.

1st & 2nd Floor, MHD1 Building,
No. 60 Hoang Quoc Viet Road,
Nghia Do Ward, Cau Giay District,
Hanoi, Vietnam

Tel: (84) 24-3768 8963

Fax: (84) 24-3768 8960

E-mail: mvc@mitutoyo.com.vn

Ho Chi Minh City Branch

Tel: (84) 28-3840 3489

Fax: (84) 28-3840 3498

E-mail: mvc@mitutoyo.com.vn

Mitutoyo Philippines, Inc.

Unit 1B & 2B LTI,
Administration Building 1,
Annex 1, North Main Avenue,
Laguna Technopark, Biñan,
Laguna 4024, Philippines

Tel: (63) 49-544 0272

Fax: (63) 49-544 0272

E-mail: mpi@mitutoyo.com.ph