



精密平行ブロック

RoHS対応

PRECISION PARALLELS No.E-9158

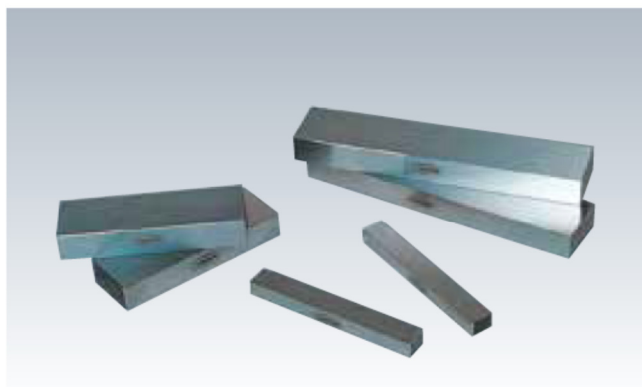

▽▽▽ (▽▽)

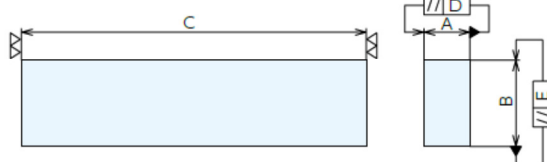

材質 S50C・FC300

熱処理 HP1~8:焼入HRC50±3 HP21~34
HP9~20:焼鈍

- 両端面を除く4面を研削仕上げ。
- 平行ブロックの利用により加工ワークが確保されますので精密加工が可能になります。

参照ページ



P.1163 ▶



薄型平行ブロック

仕様・価格表

オーダーNo.	No.	A ^{+0.03} ₀	B ^{+0.01} ₀	C	D	E	材質	質量kg
901242	HP 1	10	20	150	0.012	0.006	S50C	0.2
901243	HP 2	15	20	150	0.012	0.006	S50C	0.4
901244	HP 3	15	30	150	0.012	0.006	S50C	0.5
901245	HP 4	20	30	150	0.012	0.006	S50C	0.7
901246	HP 5	25	50	150	0.012	0.006	S50C	1.5
901247	HP 6	15	30	250	0.013	0.007	S50C	0.9
901248	HP 7	20	30	250	0.013	0.007	S50C	1.2
901249	HP 8	25	50	250	0.013	0.007	S50C	2.4
901250	HP 9	25	50	300	0.014	0.008	FC300	2.7
901251	HP10	40	50	300	0.014	0.008	FC300	4.4
901252	HP11	40	75	300	0.014	0.008	FC300	6.6
901253	HP12	50	50	100	0.012	0.006	FC300	1.8
901254	HP13	50	50	150	0.012	0.006	FC300	2.7
901255	HP14	50	50	250	0.013	0.007	FC300	4.6
901256	HP15	50	100	150	0.012	0.006	FC300	5.5
901257	HP16	50	100	250	0.013	0.007	FC300	9.1
901258	HP17	50	100	300	0.014	0.008	FC300	11.0
901259	HP18	100	100	150	0.012	0.006	FC300	11.0
901260	HP19	100	100	250	0.013	0.007	FC300	18.3
901261	HP20	100	100	300	0.014	0.008	FC300	21.9
900098	HP21	12	25	150	0.012	0.006	S50C	0.4
900100	HP22	10	20	200	0.013	0.007	S50C	0.3
900101	HP23	15	20	200	0.013	0.007	S50C	0.5
900102	HP24	15	30	200	0.013	0.007	S50C	0.7
900103	HP25	20	30	200	0.013	0.007	S50C	0.9
900104	HP26	25	50	200	0.013	0.007	S50C	2.0
934589	HP27	8	15	100	0.010	0.005	S50C	0.1
934590	HP28	10	20	100	0.010	0.005	S50C	0.2
934591	HP29	10	25	100	0.010	0.005	S50C	0.2
934592	HP30	15	35	100	0.010	0.005	S50C	0.4
934593	HP31	8	15	125	0.012	0.006	S50C	0.1
934594	HP32	10	20	125	0.012	0.006	S50C	0.2